



# 669

## TECHNICAL SPECIFICATION SHEET




BATTERY CODE	669
BATTERY TYPE	Sealed Maintenance Free
VOLTAGE	12
PRODUCT INFORMATION:	<ul style="list-style-type: none"><li>* Enhanced Flooded Battery (EFB)</li><li>* Calcium Calcium Silvernano Tech</li><li>* Automotive Application</li></ul>

### Product Specifications:

20 Hour Cn(Ah)	Reserve Cr,n(min)	(IEC/SAE) CCA(A)	Wet Weight (Kg)
80	135	800	21

### Dimensions:

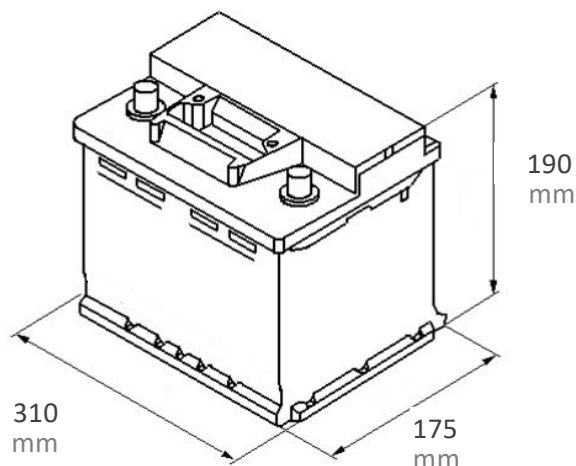


### Terminal Type and Layout

STANDARD TAPER  
TERMINAL / TYPE A



### Hold Down:

B3 - 10,5 front, back  
and ends.



### Special Features:

Polypropylene Container:	YES
Handles:	YES
Centrally Vented Cover:	YES
One Piece Din Type Cover:	YES

### TERMINOLOGY:

**CCA/SAE (Is):** Cold Cranking Amperes (CCA) is the constant discharge current in Amperes, which the battery can supply at -18°C for 30 seconds before the voltage drops below 1.2 volts per cell (7.2 volts for 12 volt battery).

**Reserve Capacity (Cr.n):** Is the time in minutes for which the battery can maintain a constant discharge current of 25A before the final voltage drops below 10.5 V at 25 ± 2°C.

**Cn:** Is the nominal electric discharge (Ah) which the battery can supply with a constant current for a period of 20 hours before the final voltage drops below 1.75 volts per cell (10.5V for 12 volt battery) at 25 ± 2°C.

